

SUSTAINABILITY CASE STUDY

Bath level management in the Consteel DC Electric Arc Furnace

A CASE STUDY AT NUCOR STEEL HERTFORD COUNTY ON THE IMPACT OF USING CORETEMP TO CONTROL HOT HEEL LEVEL AND END-POINT BATH LEVEL IN THE CONSTEEL EAF AND THE RESULTING POSITIVE EFFECTS ON INPUT ELECTRICAL ENERGY AND GRAPHITE ELECTRODE USAGE.

25/05/2023

The study evaluated the criticality of temperature, bath level, and hot heel control in a Consteel EAF. Increased control of these parameters resulted in lower input power requirements and lower electrode consumption per heat, increasing EAF operating efficiency.

INTRODUCTION

Is the Consteel EAF process in control with regards to temperature? Can the control of the hot heel level be improved and what are the benefits of doing so? What is the necessary endpoint bath level to run the Consteel EAF the most efficiently?

The control (or lack thereof) of the steel temperature directly impacts how much energy must be input into the charge to fully melt and heat. Does the steel bath heat homogeneously and how does that impact the melting process?

What effect does the residual hot heel level have on the melting and heating process for the following heat?

Does the hot heel level need to be measured directly or can it be controlled by controlling end point bath level?

SUMMARY

CoreTemp, a no-one-on-the-floor, on-demand level and temperature measurement system was installed on the EBT of NUCOR Steel Hertford County's Consteel EAF. Unlike traditional immersion probe measurement methods, CoreTemp feeds optical fiber cored wire into the melt to perform the measurements.

The EAF operators used the system to measure both steel bath temperature and level on every heat with the following objectives:

1) Increase temperature control of the melting process and assess bath temperature homogeneity.

2) Control the endpoint steel bath level

3) Control the residual hot heel level after tap

The ultimate goal of the project was to increase the life of the furnace refractory for each campaign and increase the operational efficiency of the Consteel EAF process.

RESULTS

2.47
MWH/HEAT

A reduction of electrical input energy per heat of 0.70 MWh to 2.47 MWh, depending on the maintained endpoint bath level (resultant hot heel level).

0.074
KG/TON

A reduction in graphite electrode usage of 0.074kg per melted metric ton.

12%
INCREASE

12% increase in the average number of heats on the refractory bottom.

CONCLUSION

1) Operator safety was improved by reducing or eliminating the need to go out on the operating floor for measurements.

2) Input electrical energy per heat and graphite electrode consumption per melted ton were significantly decreased, reducing plant Scope 1 and Scope 2 carbon emissions.



Bath Level Management in the Consteel DC Electric Arc Furnace



Authors

Pat Quiney (top row, left)
Metallurgist, Nucor Steel-Hertford
County, Cofield, N.C., USA
patrick.quiney@nucor.com

Kaleb Fitch (top row, right)
Meltshop Manager, Nucor Steel Sedalia
LLC, Sedalia, Mo., USA
kaleb.fitch@nucor.com

Paul Turner (bottom)
Director of Business Development,
Heraeus Electro-Nite Co. LLC,
Hartland, Wis., USA
paul.turner@heraeus.com

Leonard Meads
Sales and Service Engineer,
Heraeus Electro-Nite Co. LLC,
Hartland, Wis., USA
leonard.meads@heraeus.com

The hot heel and endpoint bath level are important factors for optimal furnace efficiency when operating an electric arc furnace (EAF), even more so for the operation of a Consteel DC EAF. A new bath level management system was implemented into practice at Nucor Steel-Hertford County (NSHC) with the goal of improved control over these aspects of the process. Without costing any additional process time, NSHC operators are able to monitor steel bath level throughout the Consteel EAF process. In addition to improving operational control of the Consteel EAF, noticeable process gains were realized.

Nucor Steel-Hertford County (NSHC) was built as a green-field investment and started up in 2000. It currently produces discrete plate between $\frac{3}{16}$ inch and 4-inch gauge at widths between 72 inches and 125 inches, across product types of plain carbon; high-strength, low-alloy (HSLA); normalized; and quench and temper. Several investments have been made since its start-up to achieve its current product offering, including: a direct reduced iron (DRI) handling system, a twin vacuum tank degasser (VTD), and a quench and temper line quickly followed up by a normalizing line.


To feed the entire mill, the meltshop operates a single 255-ton SMS DC Consteel electric arc furnace (EAF), utilizing 140 MW of electrical power. Specific investments at the EAF include: 4-point coherent side-wall lances, tilt wheel load cell pins, pneumatic flux addition systems, as well as a 6-axis robot for taking temperatures through the sidewall. All these upgrades have been meant to create a safe, robust, reliable process capable of producing the liquid steel to meet the customer needs. The most recent project at the EAF was the installation of a manless, on-demand measurement system, CoreTemp. The average anode bottom life at the EAF was approximately 645 heats, which was lower

than desired. Suspected root cause for the lower than desired bottom life was superheating of the steel in contact with the anode resulting in premature wear. This being the case, the initial goal of the CoreTemp project was to characterize temperature control and homogeneity of the Consteel EAF by measuring in a different location than the 6-axis robot and with more frequency than could be accomplished by the 6-axis robot. Early in the project, it was determined that the temperature control of the furnace was sufficient and often bath temperatures in the sump of the furnace were similar to bath temperatures near the slag door. However, during the course of this investigation, control of the hot heel level, accomplished by measuring and controlling the endpoint bath level, was more critical for consistent operation of the furnace and addressing premature wear to the anode. The details of how this measurement was accomplished, the system employed, results and further actions are discussed in this paper.

Consteel Steelmaking at Nucor Steel-Hertford County

To the readers who may be unfamiliar with Consteel, Tenova's website explains "The Consteel system

Figure 1

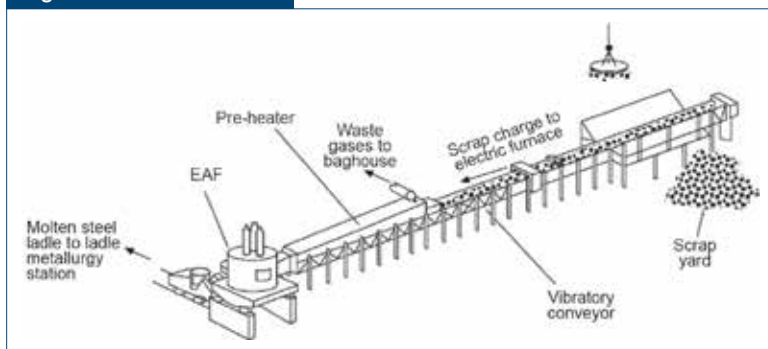

Overview of an electric arc furnace (EAF) with Consteel.²

continuously feeds and pre-heats the metallic charge (scrap, pig iron, etc.) to the EAF, while simultaneously controlling gaseous emissions.”¹ Scrap is loaded onto a horizontal reciprocating conveyor, which is a series of cascading steel pans that oscillate toward and away from the EAF in such a way that the scrap ultimately moves toward the EAF. This conveyor carries the scrap into a “pre-heat” section of the conveyor where the scrap is exposed to the countercurrent flow of the EAF offgas, absorbing heat from the offgas. Most of NSHC’s metallic needs are charged into the EAF via the Consteel conveyor; however, a significant portion of the charge metallics comes from roof-fed direct reduced iron (DRI). These two methods of metallic charging are meant to be “continuous” while the EAF is operating. A simple schematic of the components of the Consteel system is shown in Fig. 1.

In contrast, a traditional bucket-charged EAF utilizes a bucket layered with a specific charge. The

bucket is commonly loaded by crane in the scrap yard or set in a pit inside the mill and loaded by dump truck. This allows a “known” amount of scrap to be charged. This charging method differentiates a Consteel furnace from a “bucket-charged” shop and has broad impacts to operating an EAF. A basic description of a bucket charge operation includes four phases of steelmaking operation: charging, melting, refining and tapping. However, in a Consteel operation, the charging phase is simultaneous with melting, leaving the phases: charging and melting, refining, and tapping. A basic description of the Consteel operation

begins with the furnace containing a significant hot heel (~50–75% of tap weight). Then scrap steel that has been layered and positioned on the Consteel conveyor is moved through the pre-heat section entering the EAF through a hole in the sidewall. At NSHC, this area is called the lintel. The NSHC lintel is positioned opposite the mast arm and the furnace has the taphole positioned in the eccentric bottom tapping (EBT) nose, opposite the slag door. A picture of the EAF, lintel and the Consteel conveyor at NSHC is shown in Fig. 2a with a section view of a Consteel EAF shown in Fig. 2b.

At the beginning of the heat, scrap is conveyed and added in sufficient quantity to the heel to reduce the temperature and oxygen composition from the tapping condition to a reasonable operating range, typically between 2,850°F to 2,900°F, without “freezing off” or overcooling the heel.⁴ At this point, the scrap feed rate from the conveyor is reduced, and power is

Figure 2



View of the EAF, lintel and Consteel conveyor at Nucor Steel-Hertford County (a) and section view of a Consteel EAF (b).³

applied from the electrode. The heating process continues by feeding a balanced amount of scrap weight to the power applied, otherwise known as the specific energy (kWh/ton/min), to maintain a constant bath temperature. Additionally, during this time slag fluxes are pneumatically injected to allow the evolving slag chemistry to be adjusted throughout the heating process. As the sum of scrap weight added to the EAF nears the total scrap weight desired, the Consteel furnace moves into “refining” phase. While the move to refining phase may not be as distinct of a transition as a bucket-charge shop, the Consteel conveyor will slow the scrap feed while continuing to apply power and lance oxygen, reaching the desired tap temperature and oxygen content. Lastly, the tapping phase is indistinguishable between a bucket-charged and Consteel EAF. Safety inspections follow, then another heat begins.

While the previous description of a Consteel operation seems elegant, NSHC realized that obtaining a consistent charging weight is more difficult to achieve in practice than in theory. Without the “known” charging amount achieved in a bucket-charge operation, NSHC is left approximating the quantity of charge metallics added. NSHC has always performed safety inspections after tapping the furnace, which allows a visual estimate of heel height (weight). During heat processing, temperature measurements are taken using a 6-axis robot through a port in the spray-cooled shell at regular intervals to measure the bath heating rate, which is compared to total kWh consumed to approximate the total charge metallics. Additionally, load pins were added to the tilt wheels, resulting in measuring the growth in weight during heat processing. None of these tools are precise. Inspections vary on slag carryover and furnace depth. Heating rate assumes uniform scrap conveyance and heating efficiency. Load pins are weighing the entire tilt structure, steel bath, hearth, upper shell, electrode mast, water, etc., rendering them more qualitative than quantitative.

As NSHC looks toward advancements in furnace control technology for Consteel, using a specific energy balance control method is proving valuable across the industry. To further improve the control that has developed over NSHC operating history, a combination of load cell feedback and regular frequency of temperature measurements, an interest in a “continuous” bath temperature measurement system became apparent.

When Heraeus presented the CoreTemp manless, optical measurement system, it appeared to be a desirable tool for NSHC:

1. Equipment that could take temperature measurements nearly on demand, as frequent as ~30 seconds.

2. Temperature measurements could be taken earlier in the heat, when the metal level was as low as 7 inches below the taphole.
3. Temperature measurements could be taken without occupying a team member to swap probes.

This would allow NSHC a means to nearly continuously monitor the specific energy use. After an initial learning curve, CoreTemp was used to measure temperature progression during heats. It was able to measure the heat progression from starting “cold” through reaching tap specifications. Measurements of bath temperature validated how the operators skillfully maintained a temperature profile with a variety of tool accuracies. NSHC was not superheating the anode early in the heat as was previously believed. Unfortunately, this was information the operators knew too well. NSHC did not value knowing the exact temperature of the steel at this point in the heat progression. The current assessment methods employed during the heat processing provided enough information to know that the bath was cold early in the heat; knowing this was enough to take appropriate actions.


That said, CoreTemp proved to be reliable, and the operators adopted it quickly as a ready backup to the robot temperatures. Then Heraeus introduced the concept of bath level measurement, using the same optical measurement system. Providing a measurement of the top of the liquid steel level relative to the taphole height, the bath level has given NSHC’s operators a target to aim for. Across crews and levels of experience, NSHC has been able to develop improved control over a fixed, minimum bath level heat to heat. While exceedances still happen, the operators are aware of the situation and make small adjustments over time to return to a desired bath level before a slag excursion, anode wear or other EAF inefficiency causes a process delay.

As this paper will share, a larger heel size leads to a more productive furnace. That larger heel provides a head start on melting the scrap charged by allowing a large amount of scrap to be immersed in the hot heel and heating the scrap immediately by conduction and convection, getting to a flat bath more quickly.⁵⁻⁷

CoreTemp System and Level Measurement Fundamentals

An overview of the CoreTemp optical measurement system is given in Fig. 3. It is comprised of a human-machine interface (HMI) (located in the pulpit), control unit, optical cored wire coil, a cored wire feeder, wire guide tube, wire straightener and an entry port into the furnace. To keep the entry port into the EAF

Figure 3

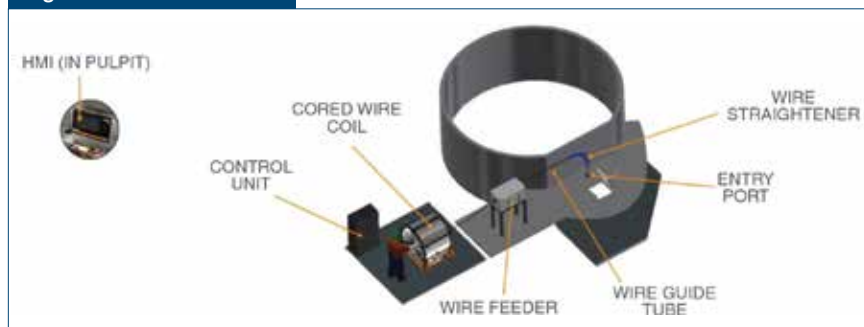

CoreTemp on-demand measurement system components. Note: The model of a person is only shown for the purposes of providing scale to the image.

clear of slag, compressed air is purged through the entry port, into the EAF.

The system overview in Fig. 3 presents a general picture of the system components. Pictures of the actual installation at NSHC can be seen in Fig. 4.

A photo of the optical cored wire traveling through the EAF freeboard down toward the bottom on an empty furnace is shown in Fig. 5. In practice, the wire is first fed at a fast rate to traverse the freeboard of the furnace and is then fed slowly as it approaches the level of the steel bath for improved measurement resolution.

As the wire is fed into the EAF during a measurement, the response (or signal) of the optical temperature measurement trace is monitored for a sharp inflection point before a stable temperature plateau is reached. This inflection point is indicative of the tip

the taphole, in units of inches.

$$\text{Bath level (in.)} = C(D_1 - D_2 \cos \theta)$$

(Eq. 1)

where

C = unit conversion factor,

D_1 = constant, vertical distance from sump panel hot face to the top of the taphole (feet),

D_2 = measured value of optical cored wire fed from the hot face to the bath (feet) and

θ = angle of optical cored wire entry into EAF ($^\circ$).

Figure 4




Picture of the CoreTemp installation on the EAF sump as viewed from the sanding hole (a) and picture of the CoreTemp installation on the EAF sump as viewed from the wire feeder (b).

Figure 5



Optical cored wire feeding into the EAF.

Figure 6

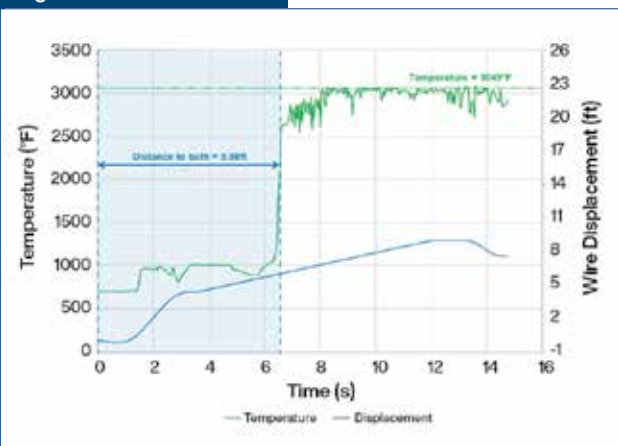

Temperature and level measurement marked-up to show how the distance to the steel bath and temperature values are determined.

Early Results

As stated earlier, the main goal at the start of the project was to determine if superheating of the steel bath was occurring early in the heat, causing premature anode bottom wear. An assessment of the heating trend of the steel bath throughout the heat, as well as temperature homogeneity in the EAF, was made. This was accomplished by comparing the temperature measurements taken by the robot near the slag door to those taken by CoreTemp in the sump. Individual heats were examined for trends. Three observations were made:

1. On many heats, the furnace was homogeneous throughout the entire melting process.
2. On some heats, the sump was hotter than the slag side of the furnace; on others it was colder.
3. On certain heats, there was a convergence effect, where the sump started out colder than the slag side of the furnace but then equalized in temperature with the slag side of the furnace near the end of the heat.

Examples of each case are given in Figs. 7 and 8, respectively.

Once it was established that superheating of the steel in contact with the anode was not occurring early in the heat, attention was refocused to determine if the CoreTemp system could reliably measure bath level throughout the entire Consteel process. For the proof-of-concept study, bath level measurements were automatically taken every 4 minutes according to the previously described optical method. The measurements were triggered automatically by the

NSHC level 1 system when the operator indicated they wanted to start automatic level measurements. Many of the heats analyzed indicated that level measurements throughout the Consteel process were indeed possible. Example heats are shown in Fig. 9.


Throughout the initial study, operators worked to carry a higher bath level (resulting in a higher hot heel level after tap), as this condition was favorable for obtaining temperature and level measurements in the sump throughout the Consteel process. Coincidentally, this furnace anode bottom lasted 744 heats, about 100 heats more than the typical furnace life at NSHC. This provided anecdotal evidence that an increased hot heel level was beneficial to increasing anode bottom life.⁸

As a result, NSHC management and operators made a process change defining a minimum end of heat bath level target of 20 inches above the taphole, measured using the optical cored wire measurement method. The process was put into place in June 2020, being fully adopted by NSHC operators on 5 June 2020. Two observations were made early on:

1. The average input electrical energy per heat decreased as the controlled hot heel level (weight) increased, as a result of improved control of the endpoint bath level.
2. Anode pin temperatures either dropped or stabilized as the controlled hot heel level (weight) increased, as a result of improved control of the endpoint bath level.


Fig. 10 illustrates the effect on input electrical power as the level control process change was implemented. The column chart on the left shows the utilization rate of the level measurements while the time

Figure 7

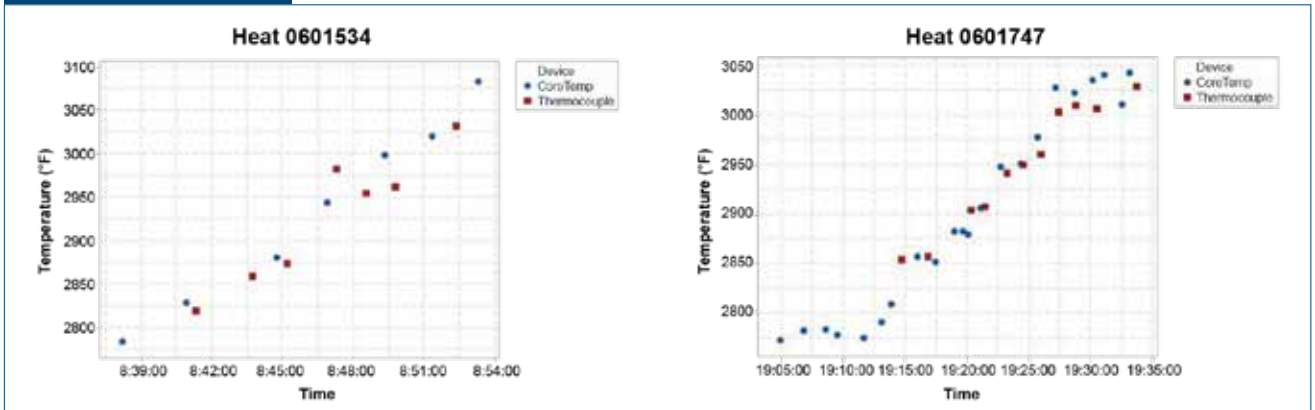


Example heats where measurements between the sump (CoreTemp) and slag door (6-axis robot with thermocouple) trended together throughout the entire heat.

Figure 8

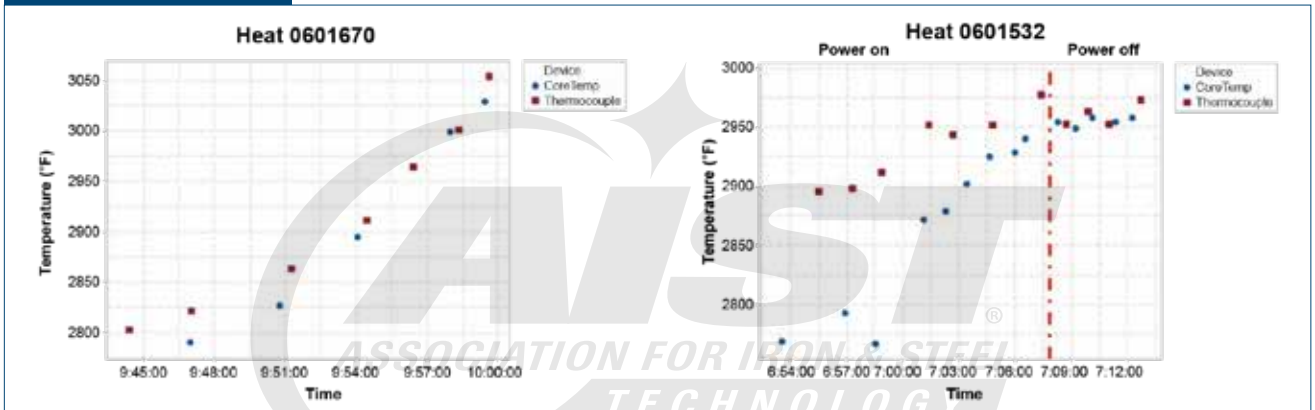

Example heats where measurements between the sump (CoreTemp) and slag door (6-axis robot with thermocouple) converged near the end of the heat.

Figure 9

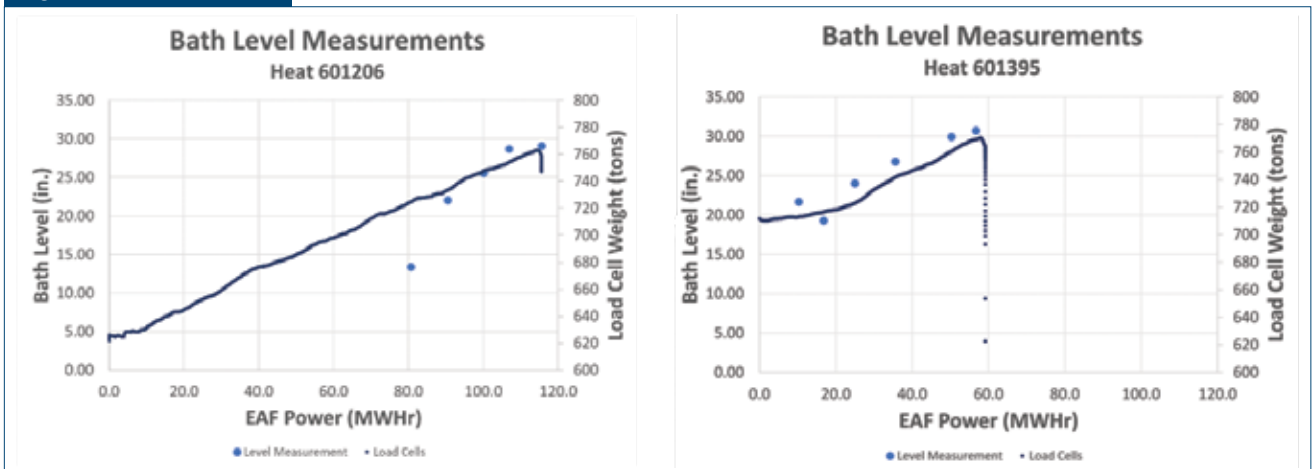

Example heats where automatic level measurements were taken throughout the heat.

Figure 10



Plot of level measurement utilization by date (a) and plot of average input electrical power and empty EAF weight (heel weight) by date (b). Note: the dramatic change in average empty EAF weight between 21 May 2020 and 31 May 2020 was due to a change in the channels which were measuring the load cells. While this created a mean shift, the load cell resolution remained the same.


series plot on the right shows the trend in average input power per heat and empty EAF weight. A vertical black line was drawn on both charts to illustrate the date that the level measurement practice was fully adopted by all furnace crews. Note: EAF empty weight is the weight of the EAF as measured by the load cells after fast back, prior to charging. Monitoring this weight heat-to-heat provides an indication if the hot heel in the furnace is growing or diminishing throughout the campaign.

Fig. 10 shows a couple of interesting points:

1. Prior to the implementation of bath level control on this EAF, the average MWh/heat was higher and the trend was noisier.
2. The average EAF empty weight began to increase at a higher rate than the time period prior to the implementation of bath level control.


To verify if the change in average MWh/heat was statistically significant, a two-sample T-test was performed at the $\alpha = 0.05$ level. The results of the test are given in Fig. 11. The resultant P-value of 0 indicates that the change in average MWh/heat of 2.47 MWh was statistically significant. This agrees with the

Figure 11

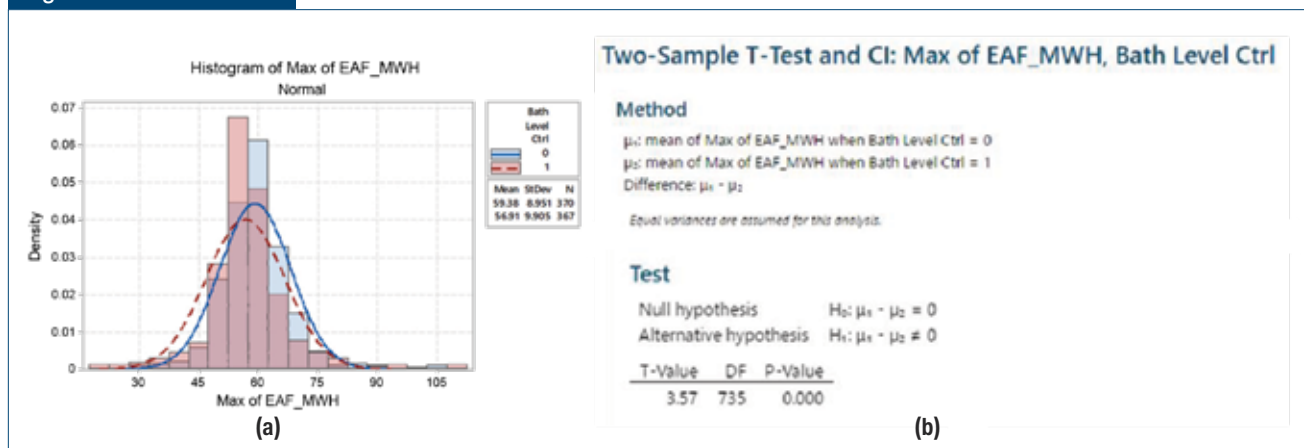

Histogram (a) and two-sample T-test output from Minitab (b).

Figure 12

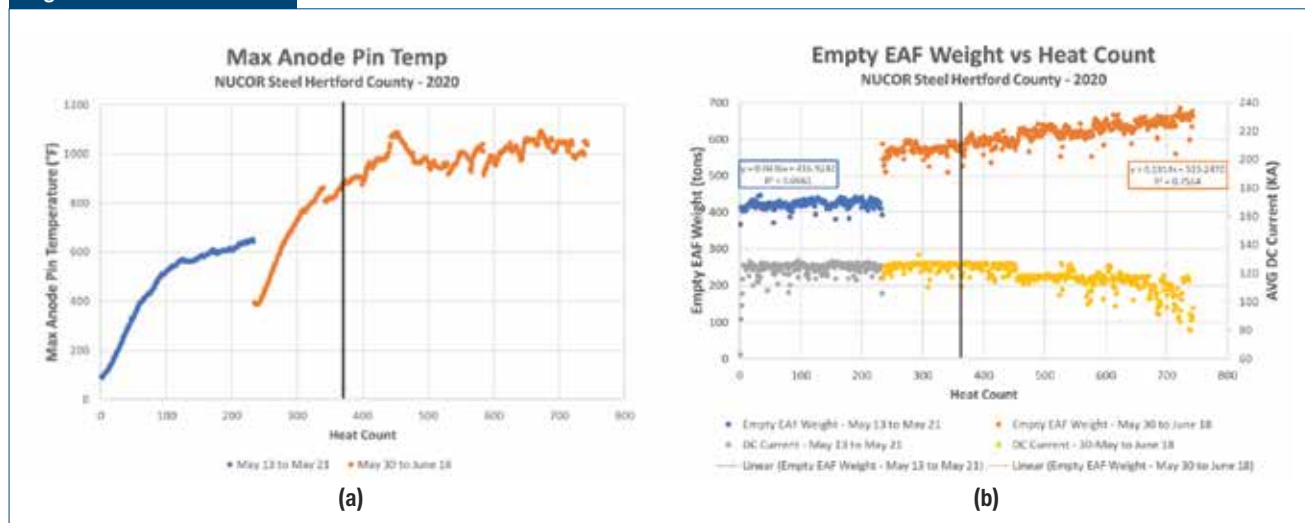

Plot of maximum anode pin temperature by heat count (a) and plot of empty EAF weight (heel weight inference) and average DC current by heat count (b).

findings of other research, which indicated that an increased hot heel level (weight) leads to lower electrical power consumption in the EAF.^{6,7,9}

When looking at the anode pin temperatures, empty EAF weight and average DC current, some additional insight was gained. The maximum upper temperature limit of the anode bottom at NSHC is 1,125°F; once the anode reaches that temperature, the furnace is taken out of service. At around 450 heats in the furnace campaign, it appeared as though the furnace was going to be removed from service imminently. At that point, it can be seen in the graphs of Fig. 12 that the EAF operator made two changes:

1. Increased the amount of retained heel in the furnace, due to being able to measure end of heat bath level.
2. Decreased the average DC current.

Both actions combined decreased the temperature of the anode back under 1,000°F and extended the life of the anode another 300 heats approximately. This agreed well with the findings of Lee et al. in 1997, specifically that higher hot heel levels were quintessential for improved anode life and that lower input electrical current also lowers anode pin temperatures, thus extending the anode bottom life.⁸

Extended Trial Results

In December 2020, there were sufficient operational data to see what the potential long-term impacts of a bath level control practice in the Consteel DC EAF

could be. Three main key performance indicators (KPIs) were focused on for this analysis:

1. Graphite electrode consumption.
2. Input EAF MWh.
3. Anode bottom life.


Since graphite electrode consumption could not be analyzed in the early results due to the relatively small sample size, it was the first KPI of interest. Plotting the monthly electrode consumption by month revealed that the electrode consumption after implementing

Figure 13



Plot of monthly electrode consumption at the Consteel EAF during the baseline analysis period (blue, solid line) and after implementing level control (orange, dotted line). NOTE: instances of electrode breaks were removed so as not to contaminate the analysis.

Figure 14

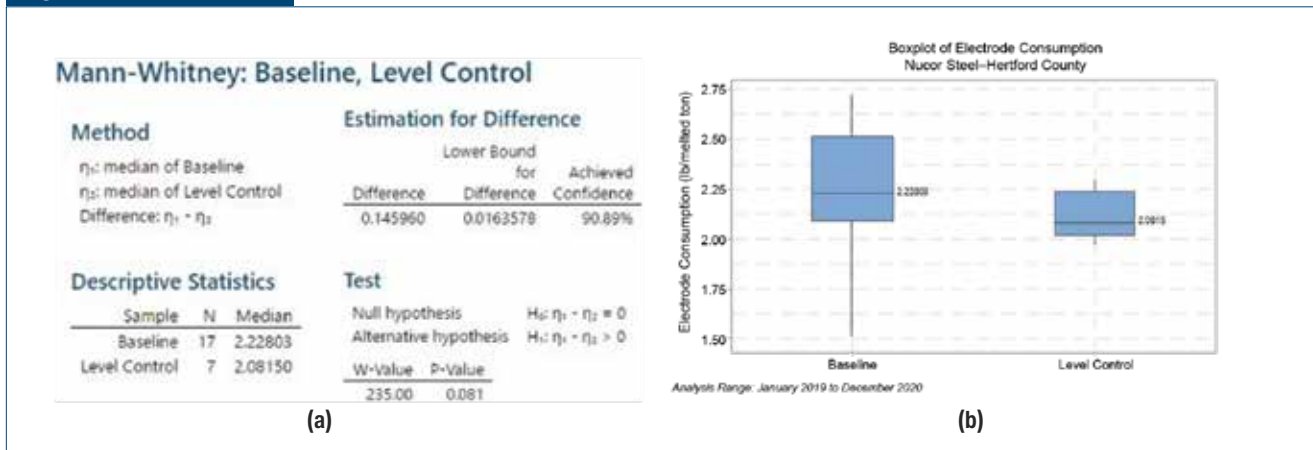

Results of the Mann-Whitney U-test on electrode consumption (a) and boxplot of the electrode consumption during the baseline period and after implementing level control (b). Note: The non-parametric Mann-Whitney test was selected instead of the two-sample T-test due to the relatively small and unequal sample sizes.

bath level control decreased and appeared to be more consistent. This plot is shown in Fig. 13.

To determine if the observed difference was statistically significant, a Mann-Whitney U-test was performed at the $\alpha = 0.10$ significance level. This test was chosen due over the two-sample T-test due to the relatively small and unequal sample sizes. The results of the test accompanied with a boxplot of the data can be seen in Fig. 14.


Examining Fig. 14, the following can be seen:

1. There is some evidence that the decrease in electrode consumption of 0.146 lbs./melted ton is statistically significant at an $\alpha = 0.10$ level, due to the obtained test P-value of 0.081 being less than 0.10.

2. The variation in electrode consumption month to month decreased nearly three times since implementing bath level control.

Next, the change in EAF input electrical MWh was examined on a large scale to see what the potential long-term impact was. Looking at the histograms of Fig. 15, the bath level control histogram appeared to be shifted left, indicating lower MWh long term using bath level control. This needed to be validated with statistical testing. Again, due to significantly different sample sizes in a number of heats made between the baseline period and the period after implementing bath level control, in addition to non-normal distributions, the Mann-Whitney U-test was selected at the

Figure 15

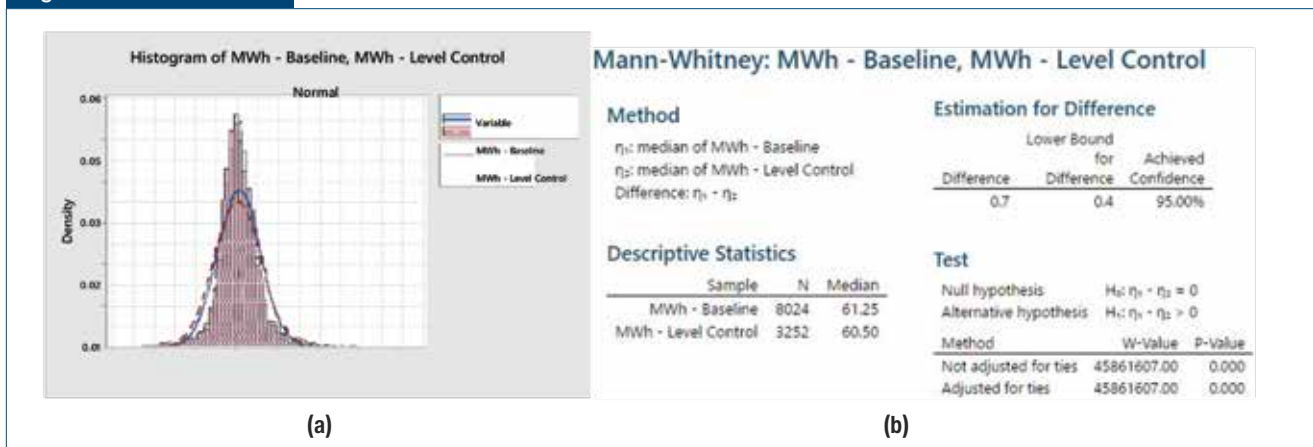

Histograms of input electrical MWh per heat from the baseline analysis period and level control analysis period (a) and results of the Mann-Whitney U-test on input electrical MWh (b).

$\alpha = 0.05$ level. The output of the test from Minitab is given in Fig. 15 as well.

With a P-value of 0, which is less than the α of 0.05, the results of the Mann-Whitney U-test confirm that the observed difference in input electrical MWh was 0.7 MWh and was statistically significant. This finding agrees with other research on the effect of keeping a larger hot heel in the EAF and its positive benefits on input electrical MWh for single-shell furnaces.^{6,7,9} What was interesting when comparing Fig. 15 to Figs. 10 and 11 was that the decrease in input MWh over a longer period was not as significant as was observed in the first campaign, when level control was implemented. Two non-exclusive explanations for this may be found. First was the variation in median bath level over time, shown in Fig. 16. While a minimum endpoint bath level of 20 inches was successfully maintained a majority of the time, the median bath level by month did vary from a max of 27 inches down to 19 inches, for a total deviation of 8 inches or up to 80 tons of steel (1 inch of bath level = approximately 10 tons of steel in the NSHC EAF). Average input electrical energy trended inversely to median bath level, suggesting carrying a hot heel larger than 20 inches was favorable for reducing input electrical energy. Secondly, another potential cause could be the influence of regular power curtailments during the months of July, August, September and October, which caused operations to stop periodically and thereby increased the number of heats with input electrical MWh over 70 MWh due to resuming operations on cold furnaces.

The last KPI examined was the life of the anode bottom. After implementing level control, several anode bottoms were removed from service prior to reaching their maximum service life (i.e., maximum pin temperature limit), as a result of market conditions and other actions being taken in the steel plant. For this reason, it was difficult to make a direct comparison on anode life during the baseline period and after implementing bath level control. However, the anode pin temperatures follow a logarithmic function with the number of heats made, which has a high correlation and makes it possible to predict what the life of the anode bottom could have been had it not been removed from service early. By transforming the data into the log domain, regression analysis and prediction of the life of the anode bottom could be performed. The anode life for each campaign from the baseline period and the projected anode life from the level control period are given in Fig. 17 along with summary statistics in Table 1.


Both Fig. 17 and Table 1 indicate, somewhat anecdotally, that the life of the anode bottom could be extended due to improved control of the bath level. However, the relationship is not 100% clear since the method used to determine this was predictive

Figure 16



Median bath level by month. September 2019 was excluded from the analysis due to extended downtime of the CoreTemp equipment during that month.

Figure 17

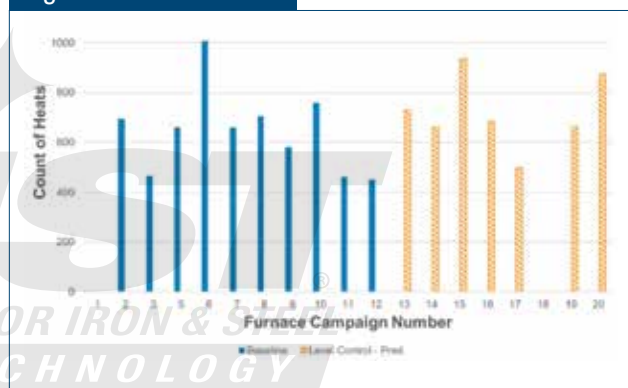

Column chart of anode bottom life per campaign. Note: Campaign 1 was removed due to partial available data and campaign 18 was removed due to extremely early removal of the furnace resulting in insufficient data to analyze.

Table 1

Summary Statistics for the Anode Life Data Presented in Fig. 17 (in number of heats)

	Baseline	After level control
Average	645	721
Median	661	685
StDev	170	146

modeling as the actual anode life was not known. This is not entirely unexpected as the next phase of the project is aimed at determining the ideal ending bath level, resulting in an ideal starting heel level for maximizing the anode life.

During the last few months of the project, an additional benefit of optical cored wire measurements was

realized: the ability to measure higher temperatures than achievable with a Type-S thermocouple. While rare, there are occasions where the Consteel conveyor can jam, preventing scrap from entering the furnace and creating a situation where the steel bath is heated well beyond the desired operational range of 2,850°F to 2,900°F. One such heat was observed where the temperature of the steel reached in excess of 3,400°F, and was unmeasurable with a Type-S, platinum/platinum-rhodium thermocouple. As a Type-S thermocouple fails open circuit at above 3,216°F, the melting point of platinum.^{10, 11} Examining data from this heat, it was clear that the optical fiber-based measurement of CoreTemp could indeed detect these higher temperatures and is shown in Fig. 18.

Future Work


The next phase of the project involves operating the EAF at different endpoint bath level targets over a series of weeks to determine the ideal endpoint bath level at NSHC, thus resulting in the ideal starting hot heel level. For example: 2 weeks at 20 inches, 2 weeks at 24 inches, and 2 weeks at 28 inches. The goal of the study is to determine at which ending bath level (i.e., starting heel level) are the greatest process gains with regard to anode bottom life, electrode consumption, power-on time, and input electrical MWh achieved. Improvements are also being made to the installation by the addition of an optical cored wire cutter. Adding the cutter will provide the following benefits:

1. A more consistent home (or start) location of the cored wire before a level measurement due to being cut in the same location each time.
2. Reduced cycle time between level measurements.

A simple diagram of the cutter is provided in Fig. 19.


As of the time of writing this paper, a cutting device, similar to what is shown in Fig. 19, has been installed and is undergoing testing. In order to ensure the cutting device survives the harsh environment of the EAF sump, significant amounts of heat shielding were added. A picture of the installation at NSHC with the cored wire cutter and added heat shielding is given in Fig. 20.

Figure 18

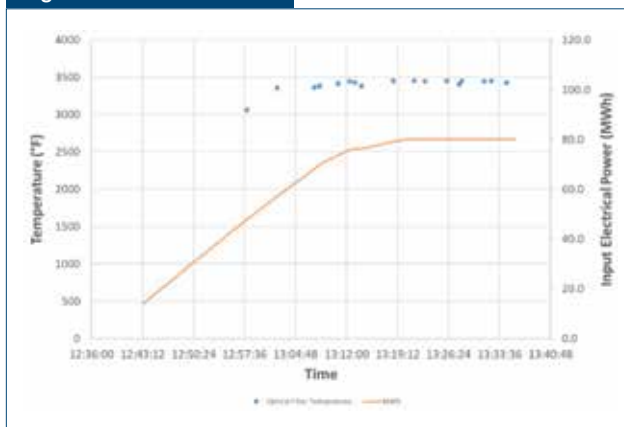

Temperature measurements from hot heat, Heat 607540.

Figure 19

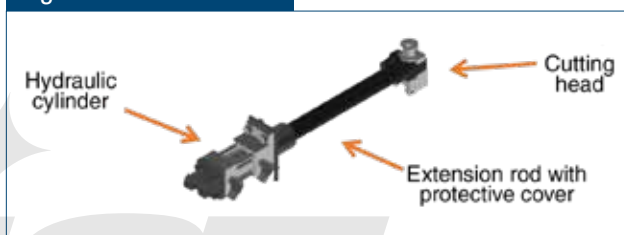

Model of the cored wire cutter installed at NSHC.

Conclusions

Conclusions from the bath level management work at NSHC in the Consteel EAF thus far are as follows:

1. A larger hot heel facilitates melting of scrap, thus lowering required input electrical energy (MWh). A reduction of electrical input

Figure 20



Installation of the cored wire cutter with the optical cored wire feeding system on the sump of the NSHC Consteel EAF.

- energy between 0.70 MWh and 2.47 MWh, depending on maintained endpoint bath level (resultant hot heel level), was seen.
2. A reduction in median graphite electrode usage of 0.146 lbs./melted ton was observed by improving control over the endpoint bath level (starting hot heel level).
 3. There is evidence that carrying a larger hot heel in the EAF extends the life of the anode bottom in a DC EAF. Since this was difficult to measure due to furnaces being removed from service early due to market conditions rather than being allowed to run to end of life, this metric will be studied more closely in future work.

These points agree well with previous research on the effect of the hot heel level has on DC EAF and Consteel DC EAF operational metrics.

Acknowledgments

The authors would like to thank all team members who have made this project successful, including Marcus Brown, Jason Courtright and Michael Evans; the EAF operators Brian Dunlow, Carl Clifton, Jeff Dunlow, Kenneth Moore and all their crewmates; and Chris Carlson of NSHC for their continued support of the project; and to Jason Black, Jeremiah Fredrick, Joseph Hallmark, Mark Willacker, Athena Olson, Monica Ruddock and Anthony Pappalardo of the Heraeus Electro-Nite CoreTemp team for their continued support and unending innovation on this project.

References

1. Consteel Continuous Charging System, Tenova, 2021, <https://www.tenova.com/product/consteel-continuous-charging-system>.
2. J.A. Jones, B. Bowman and P. Lefrank, "Electric Furnace Steelmaking," *The Making, Shaping and Treating of Steel, Steelmaking and Refining Volume*, AISE Steel Foundation, Pittsburgh, Pa., USA, 1998, pp. 525-660.
3. S.K. Sarna, Consteel Electric Arc Furnace Process, Ispat Guru, 25 June 2020, <https://www.ispatguru.com/consteel-electric-arc-furnace-process>.
4. H.M. Adjei-Sarpong, "Optimization of Nucor Hertford County's Consteel and DC EAF Operations," *AISTech 2005 Conference Proceedings*, 2005, pp. 533-544.
5. N.I. Provatas, "Modeling of Scrap Melting in the Heel of an EAF," *Iron & Steel Technology*, 2008.
6. F.G. Memoli, "The Evolution of Preheating and the Importance of Hot Heel in Supersized Consteel Systems," *Iron & Steel Technology*, Vol. 9, No. 1, pp. 70-78.
7. X.E.-E. Zhang, "Electric Arc Furnace Operation With Electromagnetic Stirring and Hot Heel," *Materials Science and Technology*, 2013, pp. 515-524.
8. M.M. Lee, "Bottom Refractory Performance in Consteel and Top Charged DC Furnaces," *Electric Furnace Conference Proceedings*, Iron & Steel Society, 1997, pp. 517-523.
9. P.N.-P. Bloemer, "Electromagnetic Bath Level Measurement System Improves EAF Melting Process Control," *AISTech 2014 Conference Proceedings*, 2014.
10. CRC Press, "The Elements," *Handbook of Chemistry and Physics*, 69th Ed., 1988, pp. B-28.
11. T.J. Glover, *Steel and Metals, Pocket Ref.*, 3rd Ed., Sequoia Publishing Inc., Littleton, Colo., USA, 2006, p. 570. ♦

This paper was presented at AISTech 2021 — The Iron & Steel Technology Conference and Exposition, Nashville, Tenn., USA, and published in the AISTech 2021 Conference Proceedings. ①

Did You Know?

SSAB to Provide Steel for New U.S. Navy Ships

Alabama-based shipbuilder Austal USA has contracted SSAB Americas to provide steel for new U.S. Navy ships, according to naval defense news site Naval Technology.

According to Naval Technology, the contract follows the U.S. Navy award to Austal to build steel-hulled towing, salvage and rescue ships.

Austal USA's partnership with SSAB supports hundreds of jobs in the greater Mobile area of Alabama. Earlier this year, Austal USA broke ground on a new steel manufacturing facility in Mobile.

"SSAB not only provides us with quality steel, but also great flexibility due to its location adjacent to us here in Mobile," said Austal USA president Rusty Murdaugh. "The ability to work quickly and in person with them on current and future steel requirements by the U.S. Navy and Coast Guard is an asset to Austal that will support our business and economic growth in our community."

Austal will source "various strength and sized steel plating from SSAB" capable of being cut, shaped, welded and fitted, reports *Naval Today*.